


# Halspan® R90 Lock Case

Euro Profile Lock Case Tested To 90 Minutes

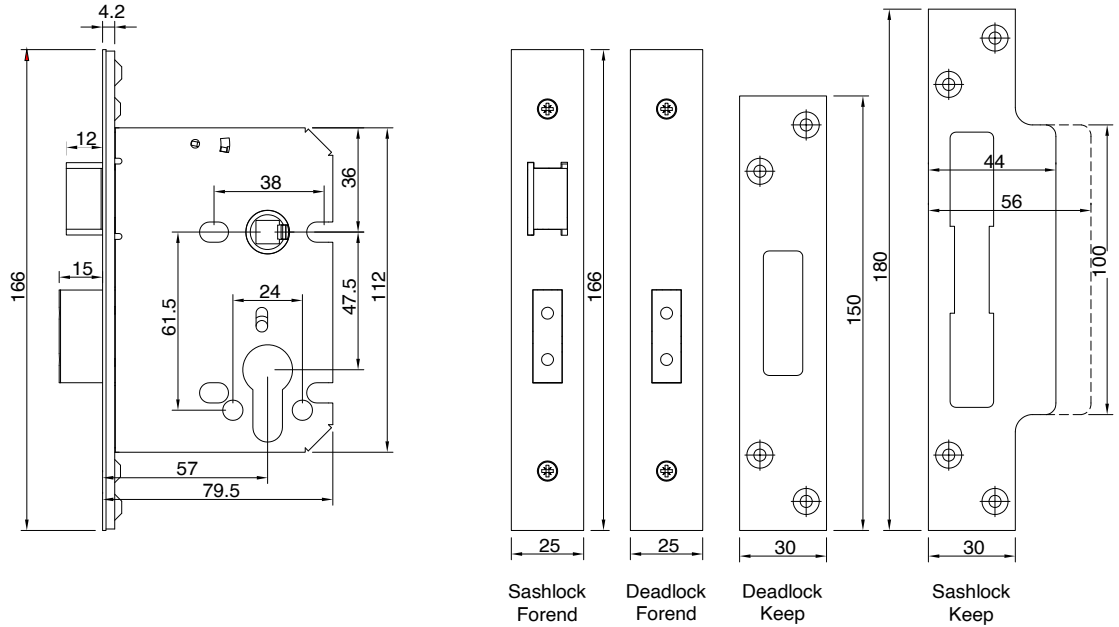

**Operation:**

Latchbolt operated by lever handle from either side  
 Deadbolt operated by key from either side using a double cylinder or by key outside and thumbturn inside using a single cylinder with turn.

**Specification:**

**Case:** Pierced to accept 24mm and 38mm centre bolt through fixing escutcheons and 38mm centre horizontally opposed bolt through fixing furniture


**Latchbolt:** Brass, reversible. Projection 12mm.

**Deadbolt:** Brass, with two hardened steel rollers. Throw 15mm.

**Follower:** Brass, to suit 8mm square spindle. One-way action. Sprung to suit unsprung lever handle furniture.

**Intumescent:** Unique formulation for the application

**Fire Testing:** Halspan R90 lock cases have been comprehensively tested to the following standards: EN 1634-1:2008 & BS 476: Part 22:1987



2mm intumescent protection to be fitted either side of the lock body, onto the lock spine and under the lock forend and strike plate (supplied)

BS EN 12209:2003 Classification

2 H 8 1 0 G 2 B A 2 0