


Halspan® R120 Lock Case

Euro Profile Lock Case Tested To 120 Minutes

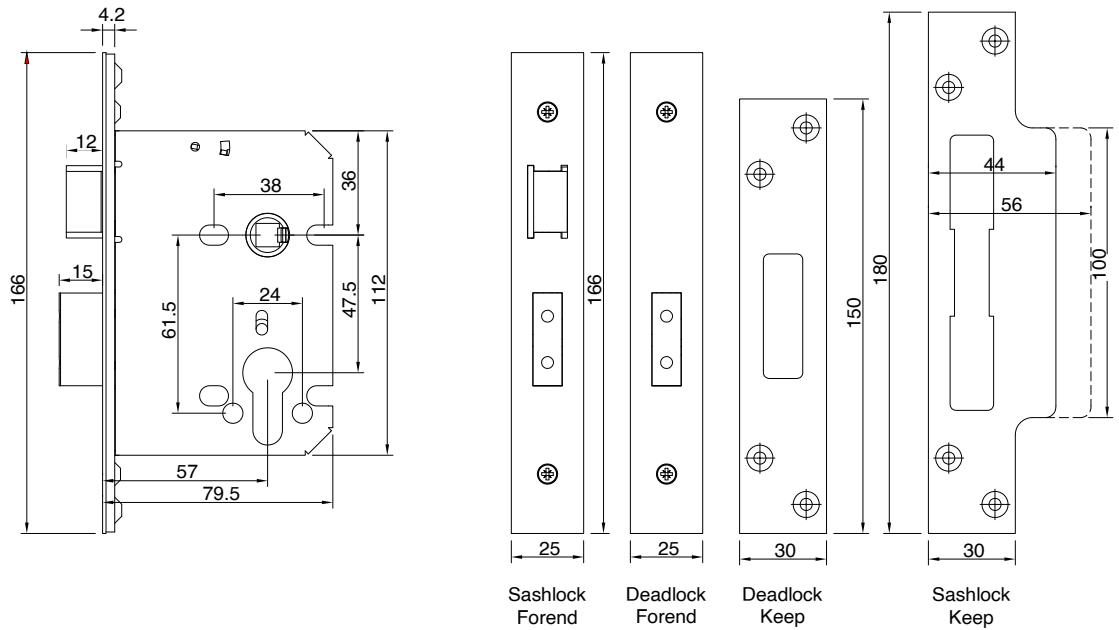

Operation:

Latchbolt operated by lever handle from either side

Deadbolt operated by key from either side using a double cylinder or by key outside and thumbturn inside using a single cylinder with turn.

Specification:

Case: Pierced to accept 24mm and 38mm centre bolt through fixing escutcheons and 38mm centre horizontally opposed bolt through fixing furniture

Latchbolt: Brass, reversible. Projection 12mm.

Deadbolt: Brass, with two hardened steel rollers. Throw 15mm.


Follower: Brass, to suit 8mm square spindle. One-way action. Sprung to suit unsprung lever handle furniture.

Intumescent: Unique formulation for the application

Fire Testing: Halspan R120 lock cases have been comprehensively tested to the following standards: EN 1634-1:2008 & BS 476: Part 22:1987



2mm intumescent protection to be fitted either side of the lock body, onto the lock spine and under the lock forend and strike plate (supplied)



BS EN 12209:2003 Classification

2 H 8 1 0 G 2 B A 2 0