


Halspan® R30 Lock Case

Euro DIN Standard Lock Case Tested To 30 Minutes

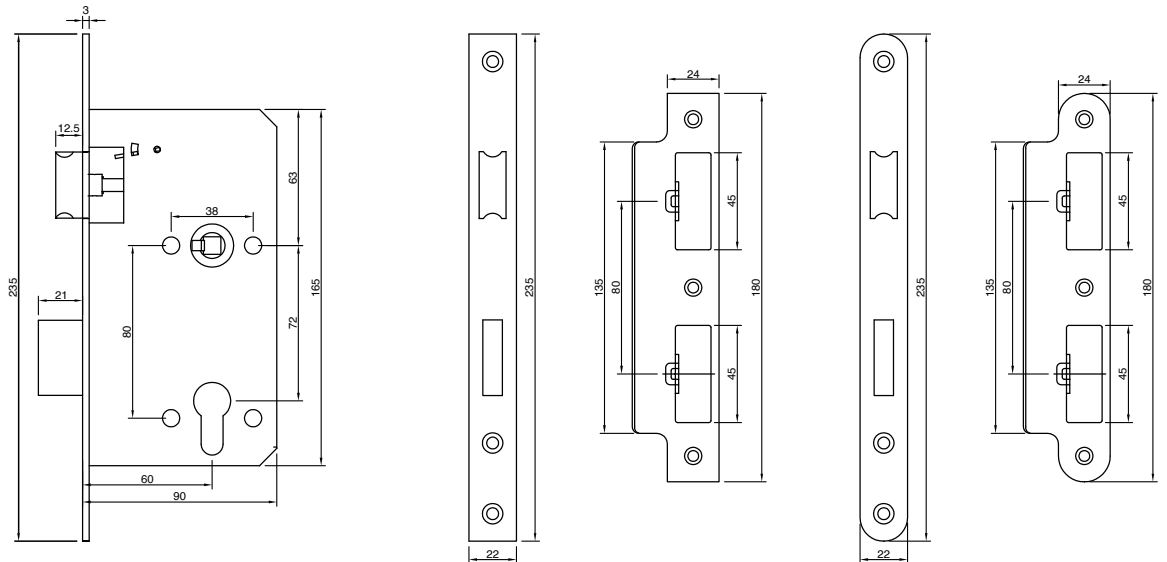

Operation:

Latchbolt operated by lever handle from either side

Deadbolt operated by key from either side using a double cylinder or by key outside and thumb turn inside using a single cylinder with turn.

Specification:

Case: Pierced to accept 38mm centre bolt through fixing escutcheons and 38mm centre horizontally opposed bolt through fixing furniture

Latchbolt: Stainless Steel, reversible. Projection 12mm.

Deadbolt: Stainless Steel. Throw 21mm. Forend and Strike Plate: Stainless Steel, available square or radius

Follower: Steel, to suit 8mm square spindle. One-way action. Sprung to suit unsprung lever handle furniture.

Intumescent: Unique formulation for the application

Fire Testing: Halspan R30 lock cases have been comprehensively tested to the following standards: EN 1634-1:2008 & BS 476: Part 22:1987



1mm intumescent protection to be fitted under the lock forend and strike plate (supplied).

BS EN 12209:2003 Classification

Category of use	Durability	Door Mass	Fire Resistance	Safety	Corrosion Resistance	Security	Field of Door	Type of Key	Type of Spindle	Key Identification
3	X	8	1	0	G	2	B	C	2	0