



HALSPAN



Halspan® R120 Hinge Including Intumescent Protection

The **Halspan R120 Hinges** provide strength and durability to compliment Halspan's full range of FD120 door cores. Fully certified and backed by our extensive fire test evidence, Halspan R120 hinges have also undergone rigorous durability testing, showing little sign of wear after passing a 1,000,000 cycle test. Halspan R120 hinges are maintenance free and come with a 25 year guarantee.



Fire

Tested in Accordance with:	BS476:pt 22:1987 ** **When fitted with approved intumescent hinge pads (supplied)
-----------------------------------	--



Product Codes & Specification

Product Code

HALSPAN® 120 Hinge:	BOM-HIN-300
Intumescent Pad:	SLS-PAD-102

Specification

- 101.6 x 76.2 x 3mm Triple knuckle butt hinge
- Grade 304 Stainless Steel
- Maintenance free, guaranteed for 25 years
- Appropriate for use with backcheck door closers
- Maximum adjusted door weight 160kg
- Unit weight 0.26kg
- CE Certificate No 1121-CPD-AC0007(SS)
- CE Certificate No 1121-CPD-AC0008 (MS)
- BS EN 1935:2002 – Class 14


Hinge BOM-HIN-300



Intumescent Pad SLS-PAD-102



Design Guide

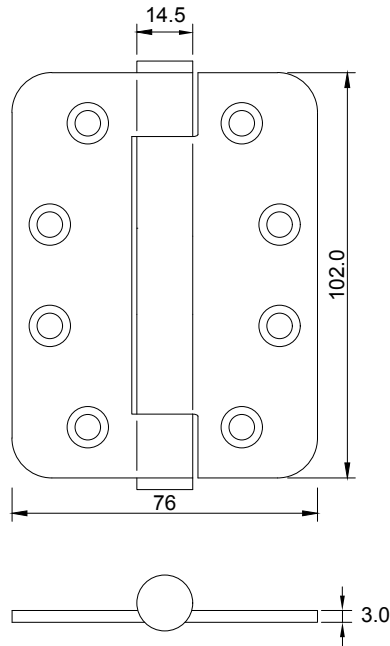

General Maintenance & Operational Notes

- Test data is based on a standard 3 hinges fitted to a doorset, as is the most common method of fixing. This is based upon 160kg max. weight door which is tested to 1,000,000 cycles in accordance with BS EN 1935:2002.
- Fitting configurations may need to be adapted based on door size, door weight and or door hardware.
- It is recommended that routine maintenance is undertaken on a bi-annual basis & in areas of extreme environment or contaminants this should be increased accordingly.
- All external & exposed surfaces require regular / weekly cleaning with a soft cloth, using warm water and mild detergent to remove built up dirt.
- For persistent stains & marks use a soft cloth, sponge or brush with a small amount household, detergent free mild abrasive.
- Surface oxidation can appear as a result of contaminants, its is recommended to clean with a cloth and warm water, before cleaning with stainless steel cleaner.
- After each and every clean, wipe down products with a separate clean dry cloth.
- The use of steel wool & steel brushes can leave particles in surfaces leading to rust, these should be avoided.
- It is recommended that routine cleaning is undertaken on a monthly basis & in areas of extreme environment or contaminants this should be increased accordingly.
- As a prerequisite of compliance it is recommended to keep a log of the adopted maintenance schedule for each installation.